

EFFECTIVENESS OF CONTINUOUS REMOVAL OF HEAT STABLE SALTS FROM CONTAMINATED AMINE SCRUBBING SOLUTIONS

Jenny Shao, *VP Business Development, Asia*
Eco-Tec Inc., Ontario, Canada
jshao@eco-tec.com

Lloyd Vaz, *Chief Executive*
Eco-Tec Solutions, Pune, India
eco-tec@eco-tecsolutions.com
www.eco-tec.com

ABSTRACT

Amine scrubbing solutions used for gas treatment at refineries, chemical, sulfur and gas processing plants remove hydrogen sulfide and carbon dioxide from gas streams. One of the problems with the amine solutions is the gradual accumulation of byproduct contaminants called heat stable salts (HSS). Increased HSS concentration in the amine loop leads to corrosion-related maintenance problems, frequent filter replacements, amine losses, excessive foaming, capacity reduction, etc.

Ion exchange resins have been employed for removal of the HSS, but because of the different affinities that the various anionic HSS contaminants have towards the resin, successful removal is restricted. Moreover, continuous on line removal of the HSS, rather than periodic treatment helps ensure a more stable and uniform conditioning operation with optimized efficiency of the amine unit operation.

A proprietary system, employing advanced ion exchange technology with unique features of fine mesh resins, short packed bed and fast cycles was introduced to this application about 10 years ago and has proved most successful in achieving the needs of efficient online HSS removal. Since then, several such systems have been installed around the world including India. This paper details the technology and various applications, including carbon dioxide sequestration. Various examples are presented, with two specific case studies: a system installation in the United States of America, and an installation in China.

INTRODUCTION

The amine-treating unit is of great importance in gas processing and refinery operations for treating acid gases and now attracts increasing attention due to the pressing needs of environmental compliance and meeting the stringent levels of H₂S and CO₂ removal. Lean amine solutions of 20-50 wt.% and relatively free of acid gases enters the top of the absorption tower and flows counter-current to the sour gas stream being fed from the bottom of the column. The acid gases in the gas stream are chemically absorbed resulting in rich amine solution that exits from the bottom of the tower and the sweet gas from the tower top.

Thermal regeneration of the rich amine is then carried out in a steam stripper where the absorbed acid gases are liberated and this regenerated (lean) amine is re-circulated back to the absorption tower top.

In the absorption process, a common problem is the formation of small quantities of Heat Stable Salts (HSS), which is not removed during steam stripping. HSS is formed due to the presence of other certain acidic components in the process gas and liquids that result in an irreversible reaction with the amine to form HSS. These contaminants include chloride, sulfate, formate, acetate, exalate, cyanamide, thiocyanate, thiosulfate, etc. The resultant salts have a relatively strong chemical bonding with essentially no dissociation with heat (in the steam stripper). This result in the gradual build up of the HSS in the amine circulation loop and when the tolerable limits of the HSS are exceeded several operational and maintenance problems are encountered some of which include:

- High corrosion rates leading to stress corrosion cracking;
- High maintenance, repair cost and safety concerns;
- Frequent filter replacements;
- Foaming and plugging in absorber tower;
- Decrease in absorption efficiency and productivity;
- Heat exchanger and reboiler tube fouling;
- Excessive heat requirements;
- Overall unit instability.

High corrosion rates, typical for a number of amine plants, as well as stress-corrosion cracking of stainless steel, usually attributed to chloride, create serious safety concerns. High corrosion leads to high repair and maintenance costs, potential environmental implications, as well as lost production. The results of a survey conducted by the National Association of Corrosion Engineers (NACE) indicate that 60% of total 24 amine plants surveyed experience stress-corrosion cracking in the amine absorbers¹. A similar survey by the Japanese Petroleum Institute reported a 72% occurrence of cracking at amine gas treating facilities. Carbon steel corrosion is often attributed to the amine contaminants which cannot be stripped and thereby accumulate in the amine solution. However, preventive measures to reduce corrosion produce good results and improve amine unit reliability at a reasonable cost.

CONTINUOUS RECLAMATION TO CONTROL IMPURITIES

In order to prevent the HSS from building up beyond critical limits, the most straightforward approach is periodic amine purging which is messy and prohibitively expensive given the current situation of increased competition, cost control and restricted waste discharge. Other periodic amine clean-ups, either on-site or off-site, are also practiced to some extent by certain plants that have to employ large equipment for vacuum distillation, conventional ion exchange or electro-dialysis. However, this approach of periodic reclaiming is cumbersome and expensive and does not effectively overcome the operational and corrosion problems caused by the anions.

It became apparent that the ideal solution to overcome HSS related problems was to have on-line amine purification (and not periodic) which would ensure a stable and uniform gas conditioning operation while the contaminant levels in the amines are restricted from building up and corrosion rate minimized.

As depicted in diagram 1, continuous on-line amine reclaiming has become recognized as the most effective solution for HSS-related problems. Furthermore, if an upset occurs upstream of the amine unit, the equipment is on-site to address the problem immediately.

In 1998, such an on-line system employing advanced ion exchange technology with unique features of fine mesh resins, short packed bed and fast cycles was introduced to this application and has proved most successful in achieving the needs of efficient HSS removal. Since then, several such systems have been installed around the world including India. Some of the features, differentiating this unique ion exchange technology from conventional ion-exchange systems, include:

- fine mesh resins;
- short & packed resin bed;
- countercurrent regeneration;
- low resin loading;
- fast flows and short cycles;
- compact and skid mounted system.

Systems employing this unique ion exchange technology were originally in use two decades earlier but for various other industrial applications for chemical purification, recovery and recycling (steel finishing operations, electro-plating, etc.).

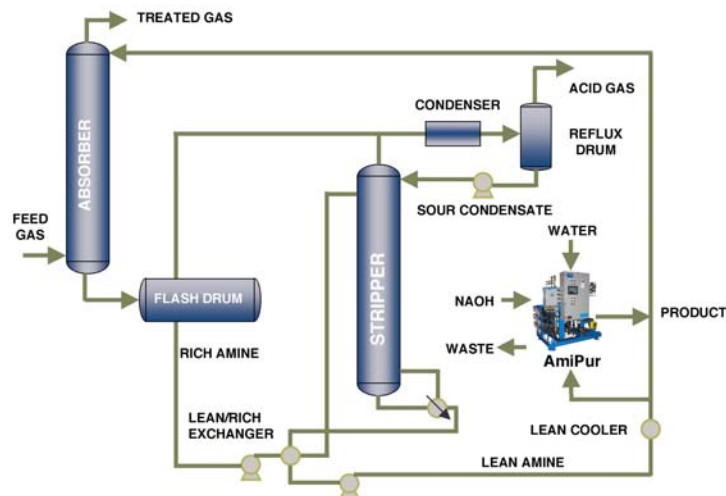



Diagram 1: Continuous Online Loop

For the Amine Purification System there are basically two steps in the operating cycle: amine contaminant loading and caustic regeneration. This cycle is automatically repeated every 10-15 minutes.



Skid-Mounted AmiPur™ System

1. Lean amine solution is pumped through the resin bed. The ion exchange resin removes the heat stable salts (HSS) and the purified amine solution is directed to the flash tank or returned into the amine loop.



2. Dilute caustic soda is used to regenerate the resin column. The unit draws concentrated caustic from the bulk tank which is automatically diluted to the proper concentration before passing through the resin bed. After a few minutes of regeneration, a water wash rinses out the excess caustic from the resin bed and a new cycle starts.



Note: $R'OH$ – resin surface, RN_3 – tertiary amine, $HCOOH$ - HSS

An initial on-line Amine Purification (AmiPur) System was installed at the Crown Central Petroleum Corporation (CCPC) refinery at Texas, U.S in 1998. The analysis of the system's “in” and “out” streams demonstrated that in addition to the removal of acetate, thiocyanate and other anions, it also reduced iron level. This, together with significant formate removal capacity, resulted in a dramatic decrease in corrosion rates and filter plugging at the Pasadena refinery.

Since then, this system has been successfully tested on all the major types of amines (Figure 1). Existing installations are operating on MDEA and DEA solutions, both at main amine and tail gas units, and have resulted in significant operating benefits for the amine plants.

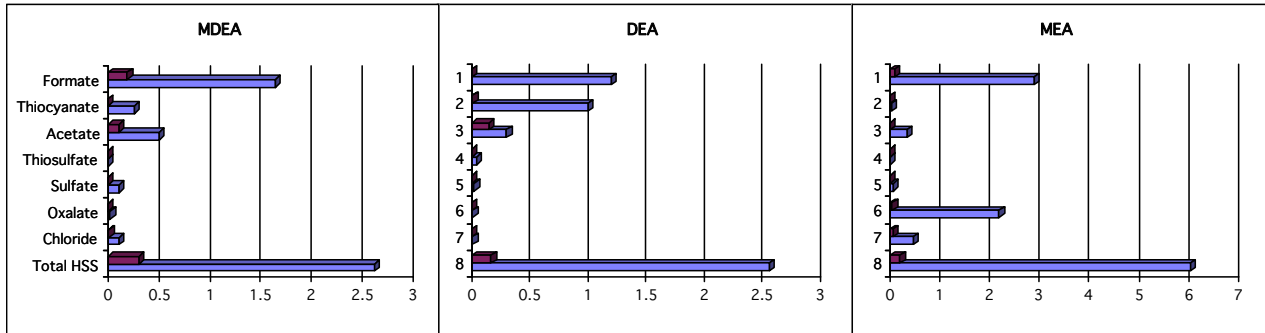


Figure 1: Anion removal by AmiPur™, Eco-Tec laboratory data

CASE STUDY I: CROWN CENTRAL PETROLEUM CORPORATION

This refinery has both primary and tail gas amine treating systems. MDEA is used at the present time in both amine systems. The primary amine unit contains a gas liquid contactor or fuel gas absorber, a spare fuel gas absorber, a liquid-liquid C3/C4 amine treater, one amine regenerator, a flash drum, heat exchangers, amine filter, a slipstream amine reclaimer, and several associated pumps. For the main fuel gas absorber, the tower's pressure drop is measured over the inlet gas line to outlet gas line, and this is used to monitor tower plugging and foaming.

- The liquid-liquid amine contactor is a trayed tower with 15 trays. It is designed to remove about 1,000 PPM H₂S from 21,000 BPD C3/C4 mix.
- The tail gas unit's amine system is very similar to the main amine system, with no flash drum and only a single amine absorber.

The MDEA amine solution absorbs the H₂S from the gas and liquid feeding the refiner's absorbers, and these absorbers send the rich amine to be regenerated in a relatively simple processing scheme. The amine unit contacts the refinery off gas products from the various unit operations, and while removing H₂S; the contact in the absorbers allows the amine to react with other species in the gas and liquid streams, causing the amine to chemically degrade. These unwanted reactions are known to occur with oxygen, CO, SO₂ cyanides, organic acids such as formates and acetates, inorganic acids such as HCl and H₂SO₄, all of which can and will be present in the off gas products from the refinery.

As HSS build, the amine filters plugged more frequently. A decrease in the amine filter life is usually the first sign of increased corrosion, and starts in the hot lean amine system that feeds the amine filters. If the amine filters do not adequately remove these products of corrosion, filter life may not be affected, but the amine solution color will be dark. Dark amine solution feeding a packed absorber tower will certainly lead to tower

plugging and foaming. This foaming then leads to increased amine losses, and the increased amine make up can temporarily reduce the HSS to slow the corrosion and improve the amine quality. As the HSS again start to build, the cycle starts again.

Low-level contaminants in the amine contactors degrade the MDEA and form the HSS, and accumulation of the salts begins to affect amine unit performance. The only way to break this frustrating cycle is to remove these salts from the solution continuously and not allow the accumulation.

At Crown Central Petroleum’s Pasadena, Texas refinery, a compressed-bed ion exchange reclaiming unit was installed in 1998 to effectively remove HSS from MDEA solution. The unit was purchased in August 1998 and started up in October. The HSS in solution were approximately 2.4% when the unit was started, and within 30 days the HSS was down to less than 2%. Material that had been accumulated from the unit, and stored in a tank was then introduced into the amine unit. The HSS level in the solution increased back to 2.4%, as we brought in 3.5% HSS material from the tank. The rented tank was then released, and the new unit brought the solution back down to 2%.

By March 1999, after a unit shutdown for maintenance, and replacement of the amine regenerator tower, the HSS level was down to 1.75%. A significant decrease in the corrosion rate was observed. The ultimate goal of the refinery is to keep the corrosion rate as close to zero as possible. To achieve this goal it was decided to decrease the HSS concentration further. The amine purification unit was designed to maintain HSS at about 1.5 wt.%, so the unit was upgraded to provide extra capacity. This work was completed in October 1999. Since then the HSS level was decreased to 0.4 wt.% as MDEA. HSS level decline is shown in Figure 2^{2, 3}.



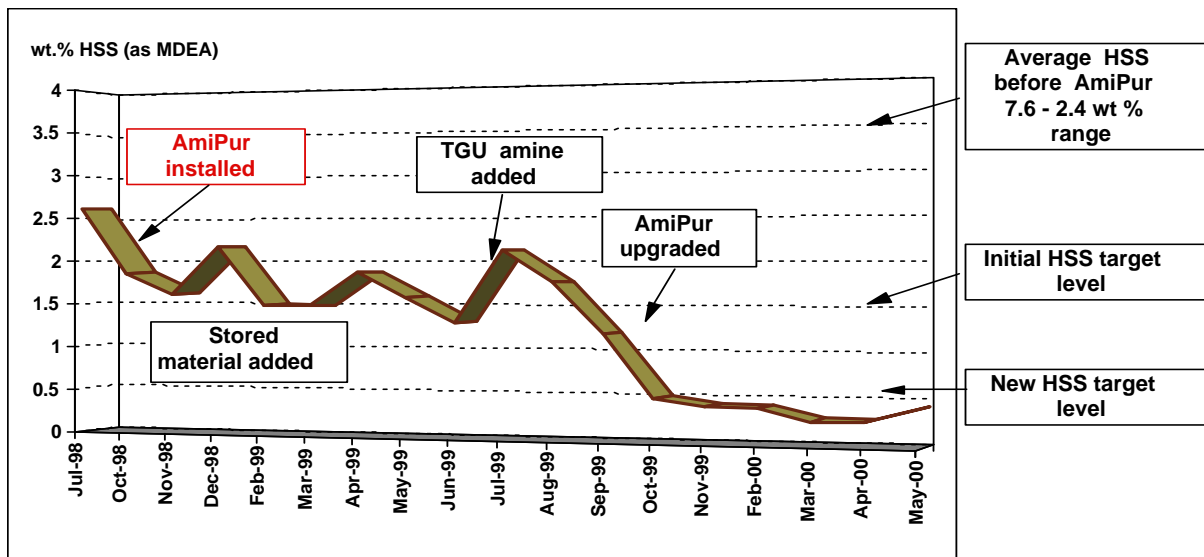


Figure 2: HSS level at the main amine unit at CCPC Pasadena refinery

The corrosion levels of CCPC's main amine solution has been monitored since 1997 using an electrical resistance probe, which is installed at the bottom of the main amine regenerator. This probe reading has compared favorably to monthly ultrasonic thickness measurements taken by the refinery's Inspection Department on the regenerator tower's shell and the amine piping (Figures 3 & 4). The regenerator tower, built in 1978, was replaced in early 1999 due to the shell's metal thickness. Since the system installation it has been possible to keep the corrosion rate at 10 mpy. The average rate for 1999 was 12 mpy. It is not unusual to get zero reading since the HSS level dropped below 1 wt.% as MDEA.

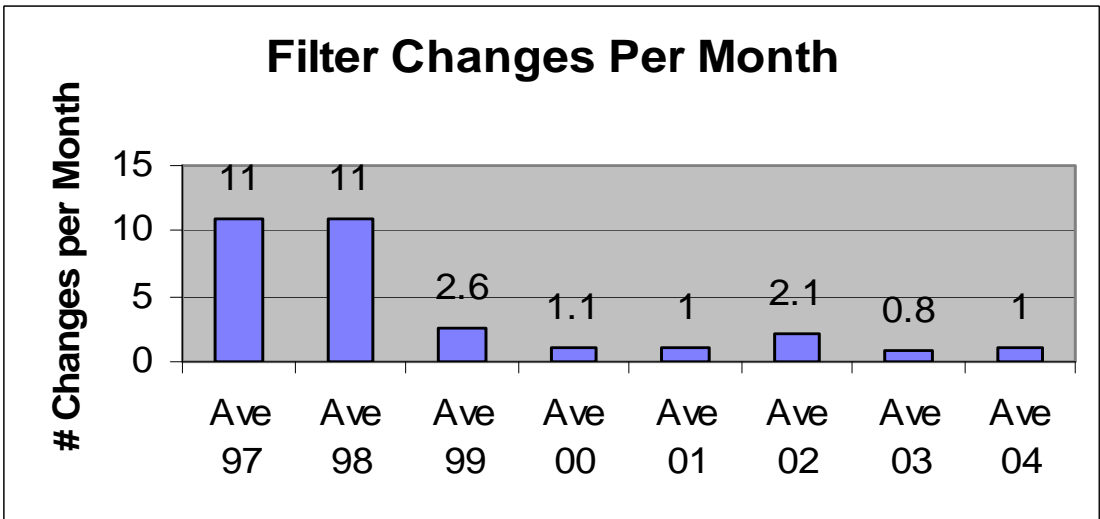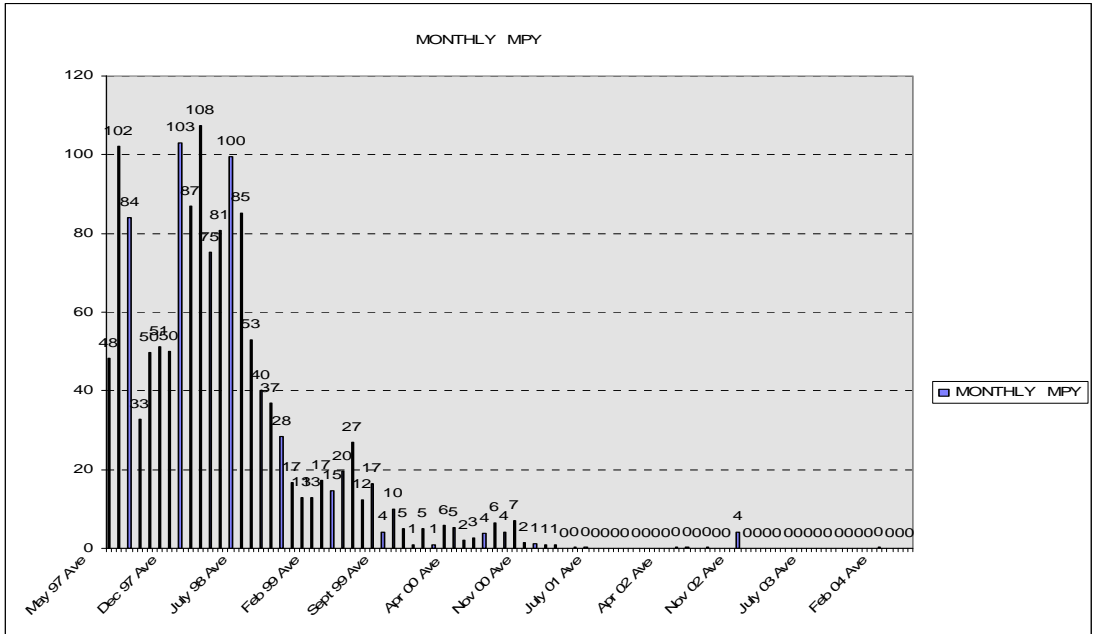

The tail gas amine unit has also been connected to the unit to allow removing the HSS from this amine unit, eliminating the need for “bleed and feed” and reducing the amine consumption associated with this operation. The flexibility that the unit provides allows the removal of the HSS from either of the amine systems on a campaign type approach. The plan is to maintain both amine systems at HSS levels below 2%, with other benefits as detailed in Table 1.

**HSS incursion rate: 1 wt. % per month (as MDEA)
Amine inventory: 15,000 Usgal**


Item	Description	Benefit	Annual savings (USD)
HSS concentration	decreased from avg. 3.5 to 0.4 wt.% as MDEA	reliable operation	
Amine foaming tendency	height/break parameters changed from 450/23 to 50/4	less foaming - operating benefits	
Power for reboiler	lower fouling of heatexchangers	lower energy consumption	
Chemical cleaning of the absorber tower	decreased from 3 times per year to zero	eliminated cost	\$16,500
Corrosion	decreased from avg. 60 mpy to avg. 12 mpy	great long-term maintenance savings	
Filter replacement	replacement frequency decreased several times	Labor and material savings	\$23,000
Amine inventory	amount of free amine increased by 3.1 wt.% (as HSS level decreased from avg. 3.5 to avg. 0.4 wt.%)	more amine is available to treat acid gas; cost savings and operating benefits	
Other costs		elimination of previously used practice of HSS control	\$35,000
Reduced amine loss	lower and more consistent absorber feed rates (less fouling and foaming)	cost savings	\$120,000
Additives	antifoamer use eliminated	cost savings	\$300

Table 1: Benefits of AmiPur™ Installation at CCPC Pasadena Refinery

CASE STUDY II: SINOPEC ZHENHAI REFINERY, CHINA

Number 2 catalytic cracking unit in Zhenhai refinery, China, has cracking capacity of 3,000,000 Tonne/year. This FCC unit is connected to an amine-scrubbing unit using MDEA, which treats 160,000 Tonne/year of dry gas and 450,000 Tonne/year of LPG. In 2001, treating capacity of LPG was increased to 600,000 - 700,000 Tonne/year.

Major problems with the amine-scrubbing unit were: high concentration of suspended solids, frequent filter clogging, amine losses due to foaming and equipment fouling, severe corrosion problems found in reboiler (Figure 6), higher temperature piping and lean/rich heat exchanger (Figures 5 & 7). Corrosion was also observed at all connections. On December 5, 2001, leaking in gas piping was found. In July 2002, both inlet and outlet piping and lean/rich heat exchanger started leaking. In September 2002, the whole unit was shut down for repair. There was 60 Tonnes of 24% dirty amine drained from the unit.

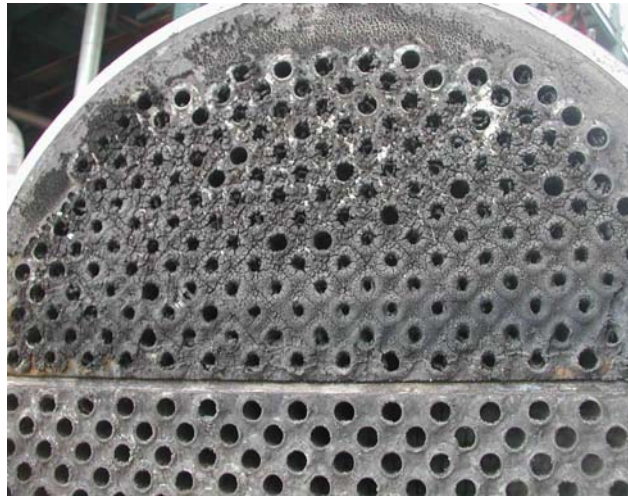

CONTINUOUS AMINE PURIFICATION UNIT OPERATION AT ZHENHAI REFINERY

Based on the HSS analysis results shown in Table 2, an online, continuous amine purification unit was selected to keep the system HSS level below 1 wt.% (as MDEA). There are two operation modes: high HSS mode and low HSS mode. The high mode is used to bring HSS level down to 1 wt.% as fast as possible. The low mode will keep the HSS concentration in amine solution below 1 wt.%

Date	6/22	6/25	6/26	6/27	6/28	6/29	7/2
HSS,wt%	6.42	6.75	6.76	6.81	6.82	6.90	7.2

Table 2: #2 FCC amine scrubbing unit Heat Stable Salt analysis results in 2001

The system was installed on August 11, 2003 and started up on August 22, 2003. By September 6, the system had been running for 2300 cycles at high HSS mode and the HSS level was brought down from 3.8 wt.% to 1.0 wt.%. The system was switched to low HSS mode and the HSS level in solution has been kept below 1 wt.% (as MDEA), lowest at 0.27 wt.%, as shown Figure 8.

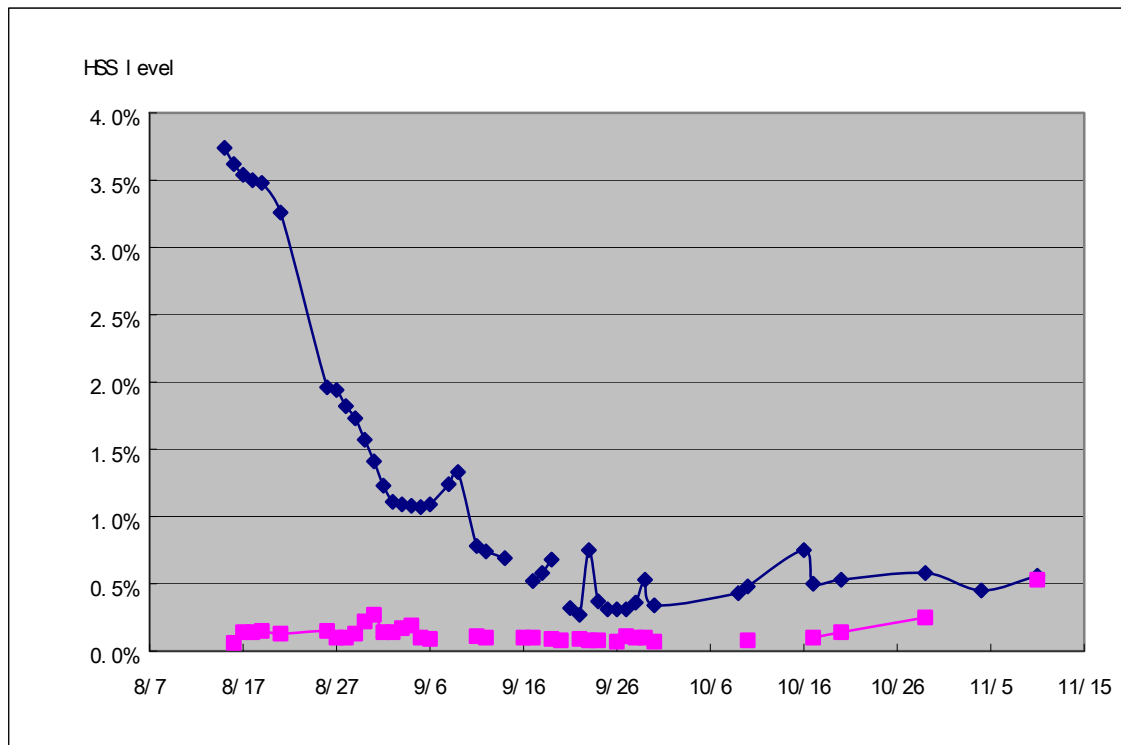


Figure 8: HSS level change in amine solution at Zhenhai refinery, China

Due to the continuous removal of HSS by the system, the corrosion rate was decreased dramatically. Average corrosion rate at the top of the regenerator before installation was 90 mpy as shown in Figure 9. When HSS level was brought down to 0.5 wt.%, the corrosion rate at the top of regenerator is as low as 2 mpy, shown in Figure 10.

When HSS level was 6 wt.% (as MDEA), foam height was 20 cm and break time was 20 seconds. Because of the low HSS level, both foam height and break time in #2 FCC amine unit are obviously better than other amine units, especially break time, shown in Table 3. When the HSS level is lowered, more amine is available for sour gas treating. In Zhenhai refinery, a 25% of amine savings was realized one month after the start up of the system.

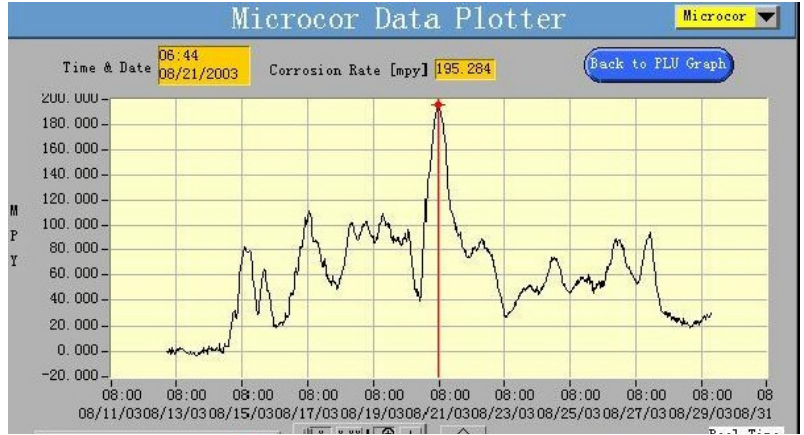


Figure 9: Corrosion rate *before* amine purification system operation at Zhenhai refinery

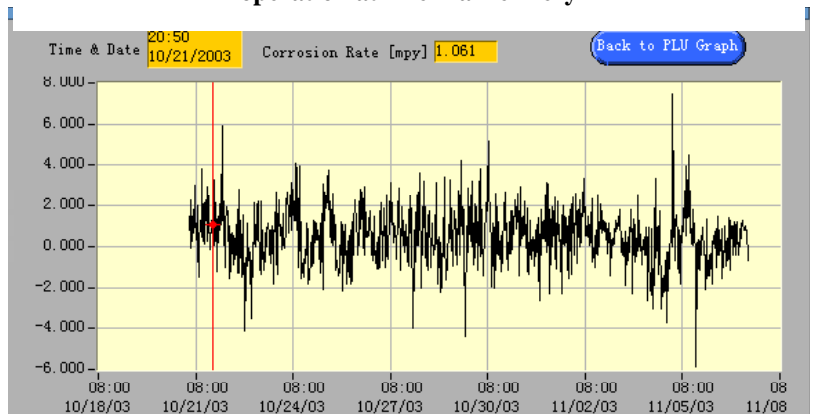


Figure 10: Corrosion rate *after* amine purification system operation at Zhenhai refinery

Time	#2 FCC			#1 FCC			Delayed coking		
	HSS	Foam height	Break time	HSS	Foam height	Break time	HSS	Foam height	Break time
10.15	0.63	3.5	5	4.62	4.0	12	3.58	5.0	18
10.16	0.65	3.0	5	4.65	4.5	10	3.62	5.5	21
10.17	0.62	3.5	6	4.69	4.0	12	3.67	5.0	23
10.18	0.60	3.5	5	4.76	4.5	13	3.75	6.0	18
10.19	0.59	3.0	6	4.88	4.0	11	3.8	5.5	19
10.20	0.59	3.5	5	4.95	4.0	12	3.87	5.0	20
11.5	0.45	3.5	5						

Table 3: Comparison of HSS level(wt%), foam height(cm), and break time(s) in different amine units at Zhenhai refinery, China

AMINE PURIFICATION TECHNOLOGY FOR CO₂ SEQUESTRATION

Carbon Dioxide (CO₂) sequestration, or capture and storage applications offer opportunities to reduce green house emissions from coal and other fossil fuel energy used in industrial applications. The most widely used and accepted method of CO₂ capture is through post combustion use of amine solvents. For over 60 years, amine “scrubbing” has been instrumental in oil and gas processing applications. For CO₂ sequestration, the underlying difference in the process is the large-scale production required for the removal of CO₂ from flue gas.

Amines used for CO₂ capture can present challenges for the operation such as increasing solvent efficiency, increasing regeneration efficiency, and reducing solvent degradation. Each of these challenges can be addressed by implementing an amine purification system into the design. An amine purification system must be able to continuously remove amine impurities to avoid the many problems associated with solvent and overall process efficiency.

By consistently maintaining low HSS levels, continuous purification results in reduced corrosion, and reduced operating costs. This efficient, advanced ion exchange method for continuously removing impurities offers high purity, reclaimed amine (Figure 11).

Different from gas processing, CO₂ sequestration operations have larger capacity demands, requiring that the amine purification system be scalable to meet the large capacity needs. Another important consideration is the amine purification system’s ability to reduce solvent degradation and loss. Effective systems that incorporate high capacity with efficient regeneration address this consideration and provide opportunities for lower operating costs.



Figure 11: Amine Purification System for CO₂ Sequestration

CONCLUSION

Amine unit operation is an important part of environmental compliance. Amine degradation causes the formation of heat stable amine salts (HSS) that can lead to corrosion. The amine unit performance begins to deteriorate as the HSS increase, and the H₂S absorber becomes less stable. Iron in solution increases, amine filter life starts to fall, and equipment corrosion and fouling can lead to an unscheduled outage.

One of the most important results of a continuous amine purification system installation is the STABLE and RELIABLE operation of the amine plant, which in turn has a dramatic environmental impact. The continuous removal of HSS has immediate and easily quantifiable results: reduction of filtration costs; elimination of periodic chemical cleaning of the absorber tower; improved gas treating capacity of the unit; elimination or reduced use of anti-foaming additives, neutralizers and corrosion inhibitors; elimination of the costs associated with previously used methods of HSS removal.

The system installed at Crown Central Petroleum, demonstrated the benefits of continuous removal of HSS for the refinery operation. The project demonstrated a payback in the range of four (4) months, exceeding original projections for a six-month payback. Amine technology within CO₂ sequestration continues to prove its effectiveness. Efficiencies and lower operating costs can be achieved with advanced ion exchange technology for the purification of amines in multiple industries.

CITATIONS

¹ Mogul M. G., *Hydrocarbon Processing*, 78 (10), 47-56, (1999)

²Daria J., Davy P., Sheedy M. *The 2000 Laurance Reid Gas Conditioning Conference*, February 27 – March 1, 2000, Norman, OK

³Davy P., Daria J. *Brimstone Sulfur Recovery Symposium*, September 14 – 17, 1999, Colorado